

# X-STREAM

## X2GK - Compact Gas Analyzer

- Up to three component gas analyzer featuring NDIR/UV/VIS photometer, paramagnetic and electrochemical O<sub>2</sub>, thermal conductivity and moisture sensors
- Enhanced performance with IntrinzX technology
- Tabletop, portable and rack-mountable 1/2 19" housing enabling extended ambient temperature range: 0 to +50 °C (32 to +122 °F)
- Plantweb connectivity and WinControl data acquisition



X-STREAM X2GK - Compact Gas Analyzer

XTR WinControl



## Features

The X-STREAM Compact 1/2 19" analyzer combines powerful analytical technology with modern communication functionality to face your analytical problem.

## Flexibility

The X-STREAM platform allows to combine infrared, ultraviolet and visible non-dispersive (NDIR/UV/VIS) photometer, paramagnetic and electrochemical O<sub>2</sub>, thermal conductivity and moisture sensors in many combination up to three channels.

## Performance

With the X-STREAM photometer technology, the analyzer provides a measuring accuracy that allows improving your process while also reducing the total cost of ownership by:

- Large dynamic ranges
- Very low temperature dependency
- Outstanding long-term stability
- Simplified calibration

## Communication

X-STREAM analyzers provide four status signal relay outputs (according to NAMUR NE 107), MODBUS TCP protocol over Ethernet or RTU over serial (RS232/485) communication.

The X-STREAM X2 analyzer provides:

- One to four analog outputs
- Optional digital inputs and relay outputs
- Serial interface with Modbus communication
- Easy integration into DeltaV systems  
A pre-engineered DeltaV module features easy integration of X-STREAM X2 into your DeltaV environment via ModbusRTU over serial interface. ProfibusDP is also supported when using a ModbusRTU-ProfibusDP gateway.
- Data acquisition with XTR WinControl  
This optional PC software supports online and offline data processing as well as data export to external devices. Calculator channels enable extended processing capabilities for measurement data. The configurable user interface enables visualization of sampling points by including a plant image as background for measured values.

### Ease of use

The instrument has an alphanumeric display and is operated manually by six keys. Clear text messages (available in several languages) and front panel LEDs provide information about the measurement and the analyzer status.

### Options in a 1/2 19" Enclosure

- Sample gas pump
- Flow measurement with alarm
- Valve block
- Pressure sensor
- Digital Input/Output cards
- Internal or external wide range power supply

### Worldwide Approvals

CE, CSA-C/US and C-Tick approvals allow global installation of X-STREAM compact gas analyzers.

### Applications


- Gas purity and air separation units
- Biogas and landfill
- Automotive emissions (ICE)
- Continuous Emission Monitoring Systems (CEMS)



Tabletop Version



Rack Version

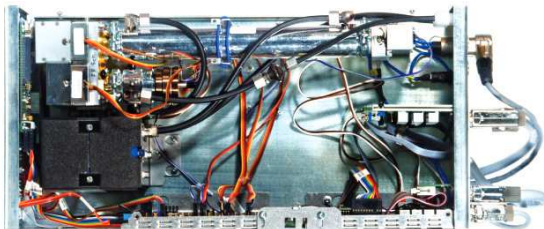

Interior view, showing one NDIR, one NDUV bench, one paramagnetic O<sub>2</sub> cell, analog and relay outputs, digital inputs, and serial interface.




XTR WinControl: Data acquisition with configurable layout.


### Process-approved Sensors

Solvent-resistant, corrosion-resistant, intrinsically safe and infallible containment“ solutions are available.

- Exhaust measurements for burner efficiency
- Natural gas production and distribution
- Metall hardening
- Oil and gas refining

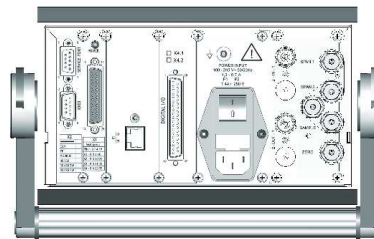

Rear panel layout with AC supply, valve block, and options Ethernet, digital I/O board and frame with handle (portable).

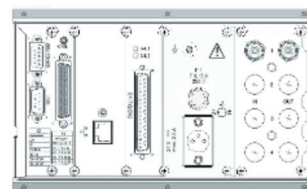

Rear panel layout with DC supply, standard gas in- and outlets, optional Ethernet and digital I/O board (rack version).

**Note!**

Rear panels layouts are exemplary only. Actual layout depends on the analyzer configuration.

## Specifications

### Lowest and Highest Ranges Available for Different Gases (Excerpt)

In total, the X-STREAM family of process gas analyzers can detect more than 60 gases. The following table is an example of the most commonly used gases. Contact your Emerson representative for information on configurations or gases that are not listed.

**Table 1 Gas Components and Measuring Ranges, Examples**

Gas component		Principle	Special Specs or Conditions	Standard Specs (Table 2 – 4)	
				Lowest Range	Highest Range
Acetone <sup>1</sup>	CH <sub>3</sub> COCH <sub>3</sub>	IR		0–1000 ppm	0–5000 ppm
Acetylene	C <sub>2</sub> H <sub>2</sub>	IR		0–3 %	0–100 %
Ammonia	NH <sub>3</sub>	IR		0–300 ppm	0–100 %
Argon	Ar	TCD		0–50 %	0–100 %
Carbon dioxide	CO <sub>2</sub>	IR	0–5 ppm <sup>4</sup>	0–50 ppm	0–100 %
Carbon monoxide	CO	IR	0–10 ppm <sup>4</sup>	0–50 ppm	0–100 %
Ethane	C <sub>2</sub> H <sub>6</sub>	IR		0–1000 ppm	0–100 %
Ethanol <sup>1</sup>	C <sub>2</sub> H <sub>5</sub> OH	IR		0–1000 ppm	0–5000 ppm
Ethylene	C <sub>2</sub> H <sub>4</sub>	IR		0–400 ppm	0–100 %
Helium	He	TCD		0–10 %	0–100 %
Hexane <sup>1</sup>	C <sub>6</sub> H <sub>14</sub>	IR		0–300 ppm	0–10 %
Hydrogen <sup>3</sup>	H <sub>2</sub>	TCD		0–5 %	0–100 %
Methane	CH <sub>4</sub>	IR		0–300 ppm	0–100 %
Methanol <sup>1</sup>	CH <sub>3</sub> OH	IR		0–1000 ppm	0–5000 ppm
n-Butane	C <sub>4</sub> H <sub>10</sub>	IR		0–800 ppm	0–100 %
Nitrogen dioxide <sup>1</sup>	NO <sub>2</sub>	UV		0–250 ppm	0–5000 ppm
Nitrogen monoxide	NO	IR		0–250 ppm	0–100 %
Nitrous oxide	N <sub>2</sub> O	IR		0–100 ppm	0–100 %
Oxygen	O <sub>2</sub>	electrochem.		0–5 %	0–25 % <sup>2</sup>
Oxygen	O <sub>2</sub>	paramagn.		0–1 %	0–100 %
Propane	C <sub>3</sub> H <sub>8</sub>	IR		0–1000 ppm	0–100 %
Propylene	C <sub>3</sub> H <sub>6</sub>	IR		0–400 ppm	0–100 %
Sulfur dioxide	SO <sub>2</sub>	UV		0–130 ppm	0–1 %
Sulfur dioxide	SO <sub>2</sub>	IR		0–1 %	0–100 %
Sulfur hexafluoride	SF <sub>6</sub>	IR		0–20 ppm	0–2 %
Toluene <sup>1</sup>	C <sub>7</sub> H <sub>8</sub>	UV		0–1000 ppm	0–1 %
Water vapor <sup>1</sup>	H <sub>2</sub> O	IR		0–1000 ppm	0–3 %
Water vapor, Trace <sup>1</sup>	H <sub>2</sub> O	capacitive		0–100 ppm	0–3000 ppm

<sup>1</sup> Dew point below ambient temperature

<sup>2</sup> Higher concentrations decrease sensor lifetime

<sup>3</sup> Special "refinery" application with 0–1% H<sub>2</sub> in N<sub>2</sub> available

<sup>4</sup> see Table 5

## Standard Performance Specifications

Table 2 IR/UV/VIS, TCD – Standard Measurement Performance Specifications

	NDIR/UV/VIS	Thermal Conductivity (TCD)
Detection limit ( $4\sigma$ ) <sup>1 4</sup>	≤ 1 %	≤ 1 %
Linearity <sup>1 4</sup>	≤ 1 %	≤ 1 %
Zero-point drift <sup>1 4</sup>	≤ 2 % per week	≤ 2 % per week
Span (sensitivity) drift <sup>1 4</sup>	≤ 0.5 % per week	≤ 1 % per week
Repeatability <sup>1 4</sup>	≤ 1 %	≤ 1 %
Response time ( $t_{90}$ ) <sup>3</sup>	$4\text{ s} \leq t_{90} \leq 7\text{ s}$ <sup>5</sup>	$15\text{ s} \leq t_{90} \leq 30\text{ s}$ <sup>6</sup>
Permissible gas flow	0.2–1.5 l/min.	0.2–1.5 l/min. <sup>11</sup>
Influence of gas flow <sup>1 4</sup>	≤ 0.5 %	≤ 1 % <sup>11</sup>
Maximum gas pressure <sup>9</sup>	≤ 1500 hPa abs. (≤ 7 psig)	≤ 1500 hPa abs. (≤ 7 psig)
Influence of pressure <sup>2</sup>		
– At constant temperature	≤ 0.10 % per hPa	≤ 0.10 % per hPa
– With pressure compensation <sup>7</sup>	≤ 0.01 % per hPa	≤ 0.01 % per hPa
Permissible ambient temperature	0 to +50 °C (32 to 122 °F)	0 to +50 °C (32 to 122 °F)
Influence of temperature <sup>1 12</sup> (at constant pressure)		
– On zero point	≤ 1 % per 10 K	≤ 1 % per 10 K
– On span (sensitivity)	≤ 5 % (0 to +50 °C / 32 to 122 °F)	≤ 1 % per 10 K
Thermostat control	none	none <sup>10</sup>
Warm-up time <sup>6</sup>	15 to 50 minutes <sup>5</sup>	approx. 50 minutes

Note! 1 psi = 68.95 hPa

<sup>1</sup> Related to full scale

<sup>2</sup> Related to measuring value

<sup>3</sup> From gas analyzer inlet at gas flow of 1.0 l/min (electronic damping = 0 s)

<sup>4</sup> Constant pressure and temperature

<sup>5</sup> Dependent on integrated photometer bench

<sup>6</sup> Depending on measuring range

<sup>7</sup> Pressure sensor is required

<sup>9</sup> Limited to atmospheric if internal sample pump

<sup>10</sup> Thermost. controlled sensor: 75 °C (167 °F)

<sup>11</sup> Flow variation within ± 0.1 l/min

<sup>12</sup> Temperature variation: ≤ 10 K per hour

Table 3 Trace Moisture – Standard Measurement Performance Specifications

	Trace Moisture (tH <sub>2</sub> O)
Measurement range	-100 to -10 °C dew point (0–3000 ppm)
Measurement accuracy	±2 °C dew point
Repeatability	0.5 °C dew point
Response time ( $t_{95}$ )	5 min (dry to wet)
Operating humidity	0 to 100 % r.h.
Sensor operating temperature	-40 to +60 °C
Temperature coefficient	Temperature compensated across operating temperature range
Operating pressure	Depending on sequential measurement system, see analyzer specification <sup>1</sup> max. 1500 hPa abs / 7 psig
Flow rate	Depending on sequential measurement system, see analyzer specification <sup>1</sup> 0.2 to 1.5 l/min

<sup>1</sup> If installed in series to another measurement system, e. g. IR channel

Note! 1 psi = 68.95 hPa

**Table 4 Oxygen – Standard Measurement Performance Specifications**

	Oxygen Sensors	
	Paramagnetic (pO <sub>2</sub> )	Electrochemical (eO <sub>2</sub> )
Detection limit (4 $\sigma$ ) <sup>1 4</sup>	≤ 1 %	≤ 1 %
Linearity <sup>1 4</sup>	≤ 1 %	≤ 1 %
Zero-point drift <sup>1 4</sup>	≤ 2 % per week	≤ 2 % per week
Span (sensitivity) drift <sup>1 4</sup>	≤ 1 % per week	≤ 1 % per week
Repeatability <sup>1 4</sup>	≤ 1 %	≤ 1 %
Response time (t <sub>90</sub> ) <sup>3</sup>	< 5 s	approx. 12 s
Permissible gas flow	0.2–1.5 l/min	0.2–1.5 l/min.
Influence of gas flow <sup>1 4</sup>	≤ 2 % <sup>9</sup>	≤ 2 %
Maximum gas pressure <sup>7</sup>	≤ 1500 hPa abs. (≤ 7 psig) <sup>11</sup>	≤ 1500 hPa abs. (≤ 7 psig)
Influence of pressure <sup>2</sup>		
– At constant temperature	≤ 0.10 % per hPa	≤ 0.10 % per hPa
– With pressure compensation <sup>6</sup>	≤ 0.01 % per hPa	≤ 0.01 % per hPa
Permissible ambient temperature	0 to +50 °C (32 to 122 °F)	5 to +45 °C (41 to 113 °F)
Influence of temperature <sup>1 10</sup> (at constant pressure)		
– On zero point	≤ 1 % per 10 K	≤ 1 % per 10 K
– On span (sensitivity)	≤ 1 % per 10 K	≤ 1 % per 10 K
Thermostat control	none <sup>8</sup>	none
Warm-up time	Approx. 50 minutes	-

Note! 1 psi = 68.95 hPa

<sup>1</sup> Related to full scale

<sup>2</sup> Related to measuring value

<sup>3</sup> From gas analyzer inlet at gas flow of 1.0 l/min  
(electronic damping = 0 s)

<sup>4</sup> Constant pressure and temperature

<sup>5</sup> reserved for future use

<sup>6</sup> Pressure sensor is required

<sup>7</sup> Limited to atmospheric if internal sample pump

<sup>8</sup> Thermost. controlled sensor: 60 °C (140 °F)

<sup>9</sup> For ranges 0–5...100 % and flow 0.5...1.5 l/min

<sup>10</sup> Temperature variation: ≤ 10 K per hour

<sup>11</sup> No sudden pressure surge allowed

### Note 1!

Not all data listed are applicable to all analyzer versions (e.g. 60 °C thermostat controlled box is not available for electrochemical oxygen).

### Note 2!

For NDIR/UV/VIS measurements, take into account that sample gas may diffuse or be released by leakages into the analyzer enclosure. If existent in the analyzer surroundings, the component to be measured may enter the enclosure. Concentrations then may increase inside the enclosure. High concentrations of the component to be measured inside the enclosure may influence the measurement by unintended absorption, which could cause drift of the measurement. A remedy for this issue is to purge the housing with gas not containing the component of interest.

### Note 3!

Measurement principles or composition of sample gas may limit the available options for a specific analyzer configuration concerning e. g. sample handling options or tubing materials.

## Special Performance Specifications for Gas Purity Measurements (ULCO & ULCO<sub>2</sub>)

Table 5 Special Performance Specifications for Gas Purity Measurements

	0–10...< 50 ppm CO 0–5...< 50 ppm CO <sub>2</sub>
Detection limit (4 $\sigma$ ) <sup>1 2</sup>	< 2 %
Linearity <sup>1 2</sup>	< 1 %
Zero-point drift <sup>1 2 3</sup>	< 2 % resp. < 0.2 ppm <sup>9</sup>
Span (sensitivity) drift <sup>1 2 4</sup>	< 2 % resp. < 0.2 ppm <sup>9</sup>
Repeatability <sup>1 2</sup>	< 2 % resp. < 0.2 ppm <sup>9</sup>
Response time (t <sub>90</sub> ) <sup>7</sup>	< 10 s
Permissible gas flow	0.2–1.5 l/min.
Influence of gas flow <sup>1 2</sup>	< 2%
Maximum gas pressure <sup>10</sup>	≤ 1500 hPa abs. (≤ 7 psig)
Influence of pressure <sup>5</sup>	
– At constant temperature	≤ 0.1 % per hPa
– With pressure compensation <sup>8</sup>	≤ 0.01 % per hPa
Permissible ambient temperature	+15 to +35 °C (59 to 95 °F)
Influence of temperature <sup>6</sup> (at constant pressure)	
– On zero point	< 2 % per 10 K resp. < 0.2 ppm per 10 K <sup>9</sup>
– On span (sensitivity)	< 2 % per 10 K resp. < 0.2 ppm per 10 K <sup>9</sup>
Thermostat control	None

Note! 1 psi = 68.95 hPa

<sup>1</sup> Related to full scale

<sup>2</sup> Constant pressure and temperature

<sup>3</sup> Within 24 h; daily zero calibration requested

<sup>4</sup> Within 24 h; daily span calibration recommended

<sup>5</sup> Related to measuring value

<sup>6</sup> Temperature variation: ≤ 10 K per hour




<sup>7</sup> From gas analyzer inlet at gas flow of 1.0 l/min

<sup>8</sup> Barometric pressure sensor is required

<sup>9</sup> Whichever value is higher

<sup>10</sup> Limited to atmospheric if internal sample pump



## General Specifications

Compliances	EN 61010-1, EN 61326, NAMUR, CSA-C/US, C-Tick			
Gas Connections	PVDF: 6/4 mm; Stainless steel: 6/4 mm or 1/4"; for more options c.f.			
Rated voltage	100–240 V~, 50/60 Hz	or	DC 24 V	
Rated input current	2–1 A	or	2.5 A	
Power input	IEC mains appliance	or	3-pin XLR connector	
Signal Connections	Submin connectors, RJ45			
Enclosure Protection	IP 20 acc. EN 60529 for indoor installation, protected against direct sunlight			
Humidity (non-condensing)	< 90 % r.h. @ 20 °C (68 °F) < 70 % r.h. @ 40 °C (104 °F)			
Weight	Approx. 8–12 kg (7.6–26.5 lbs) depending on configuration			
Options	Integrated flow measurement(s) with alarm(s), barometric pressure sensor, case purge, sampling pump(s) and/or solenoid valve block(s) for autocalibration			

## Signal In- & Outputs, Interfaces

Analog signal outputs:	1–4, individually optically isolated 4(0)–20 mA ( $R_g \leq 500 \Omega$ )
Relay outputs:	4 status relays acc. NAMUR NE 107 or e.g. concentration thresholds, valve status notification dry contacts: 1 A, 30 V
Communication interface:	RS 485 / 232C with Modbus RTU optional: Ethernet with Modbus TCP
Digital I/O (optional):	7 digital inputs (for remote control); max. 30 VDC, 2.3 mA, common ground 9 additional relay outputs (e.g. concentration thresholds, valve status notification, flow alarm, range ID) dry contacts: 1 A, 30 V


## Dimensions

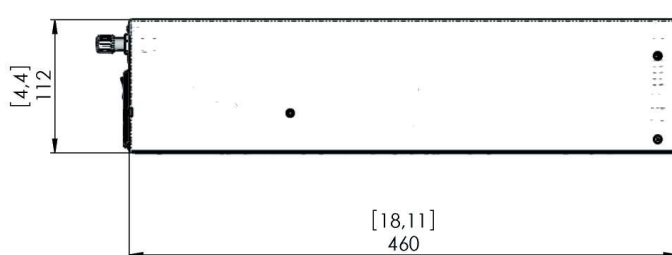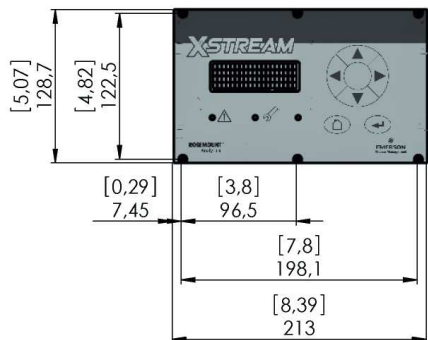


Rack mountable version.


All dimensions in mm  
[inches in brackets]

**www.RosemountAnalytical.com**

 [www.analyticexpert.com](http://www.analyticexpert.com)

 [www.youtube.com/user/RosemountAnalytical](http://www.youtube.com/user/RosemountAnalytical)

 [www.twitter.com/RAIhome](http://www.twitter.com/RAIhome)

 [www.facebook.com/EmersonRosemountAnalytical](http://www.facebook.com/EmersonRosemountAnalytical)

**EUROPE**

**Emerson Process Management  
GmbH & Co. OHG**

Rosemount Analytical  
Process Gas Analyzer Center of Excellence  
Industriestrasse 1  
63594 Hasselroth, Germany  
T +49 6055 884 0  
F +49 6055 884 209



**ASIA-PACIFIC**

**Emerson Process Management**

Asia Pacific Private Limited  
1 Pandan Crescent  
Singapore 128461  
Republic of Singapore  
T +65 6 777 8211  
F +65 6 777 0947  
[analytical@ap.emersonprocess.com](mailto:analytical@ap.emersonprocess.com)

**AMERICAS**

**Emerson Process Management**

Rosemount Analytical  
Gas Chromatograph Center of Excellence  
10241 West Little York, Suite 200  
Houston, TX 77040 USA  
Toll Free 866 422 3683  
T +1 713 396 8880 (North America)  
T +1 713 396 8759 (Latin America)  
F +1 713 466 8175  
[gc.csc@emerson.com](mailto:gc.csc@emerson.com)

**MIDDLE EAST AND AFRICA**

**Emerson Process Management**

Emerson FZE  
P.O Box 17033  
Jebel Ali Free Zone  
Dubai, United Arab Emirates  
T +971 4 811 8100  
F +971 4 886 5465  
[analytical@ap.emersonprocess.com](mailto:analytical@ap.emersonprocess.com)

©2013 Emerson Process Management. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount Analytical is a mark of one of the Emerson Process Management family of companies. All other marks are the property of their respective owners.

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

**ROSEMOUNT**<sup>®</sup>  
Analytical

  
**EMERSON**<sup>™</sup>  
Process Management